

کیفیت قابل اطمینان




مشخصات جرثقیل برجی

ظرفیت در نوک جیب (t)	حداکثر ظرفیت باربرداری (t)	طول جیب (m)	ارتفاع استاندارد (m)	مدل دستگاه	ردیف
1.3	6	56	40.5	TC5613-6	1
1.6	8	60	60	TC6016A-8	2
1.7	10	65	52	TC6517B-10	3
1.5	12	65	52	TC6515-12	4
3	12	70	54	TC7030B-12	5
2.5	16	75	51.3	TC7525-16	6
3.5	16	70	61.5	TC7035B-16	7

TOWER CRANE

MODEL: TC5613-6

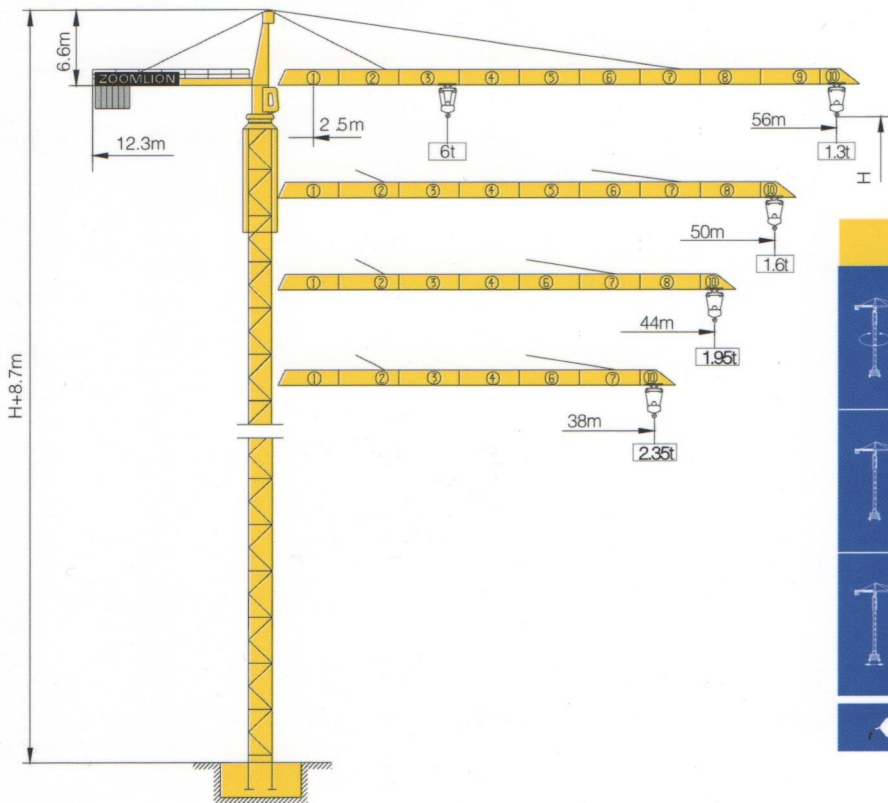

Mechanisms			Hoisting		GS680D
	回转 Slewing	HPW40B.100		I	3t 8.88 m/min
	0-0.8 r/min	2x4 kW		II	6t 4.44 m/min
	变幅 Trolley	BE33E		I	3t 40 m/min
	50/25 m/min	3.3/2.2 kW		II	6t 20 m/min
	行走 Travelling	ZA52-D ZC52-D		I	1.5t 80 m/min
	0-25 m/min	2x52 kW		II	3t 40 m/min

Anchorage



Load Diagrams

R(m)	Max.Capacity m/t	17	20	23	26	29	32	35	38	41	44	47	50	53	56
56m (R=57.03)	2.5-29.6m 3t	3.00					2.73	2.44	2.20	1.99	1.82	1.66	1.53	1.41	1.30
	2.5-16.2m 6t	5.70	4.71	4.00	3.45	3.02	2.67	2.38	2.14	1.93	1.76	1.60	1.47	1.35	1.24
50m (R=51.03)	2.5-29.9m 3t	3.00					2.84	2.55	2.30	2.08	1.90	1.74	1.6		
	2.5-16.8m 6t	5.92	4.90	4.16	3.59	3.14	2.78	2.49	2.24	2.02	1.84	1.68	1.54		
44m (R=45.03)	2.5-31.2m 3t	3.00					2.91	2.61	2.35	2.14	1.95				
	2.5-17.1m 6t	6.00	5.01	4.26	3.68	3.22	2.85	2.55	2.29	2.08	1.89				
38m (R=39.03)	2.5-31.2m 3t	3.00					2.91	2.61	2.35						
	2.5-17.1m 6t	6.00	5.01	4.26	3.68	3.22	2.85	2.55	2.29						



Electronic Parts Of Japan & France



Mitsubishi PLC Of Japan



Powerful Hoisting Motors & Winch



Operation Panel