

کیفیت قابل اطمینان




مشخصات جرثقیل برجی

ظرفیت در نوک جیب (t)	حداکثر ظرفیت باربرداری (t)	طول جیب (m)	ارتفاع استاندارد (m)	مدل دستگاه	ردیف
1.3	6	56	40.5	TC5613-6	1
1.6	8	60	60	TC6016A-8	2
1.7	10	65	52	TC6517B-10	3
1.5	12	65	52	TC6515-12	4
3	12	70	54	TC7030B-12	5
2.5	16	75	51.3	TC7525-16	6
3.5	16	70	61.5	TC7035B-16	7

TOWERCRANE

MODEL: TC6016A-8


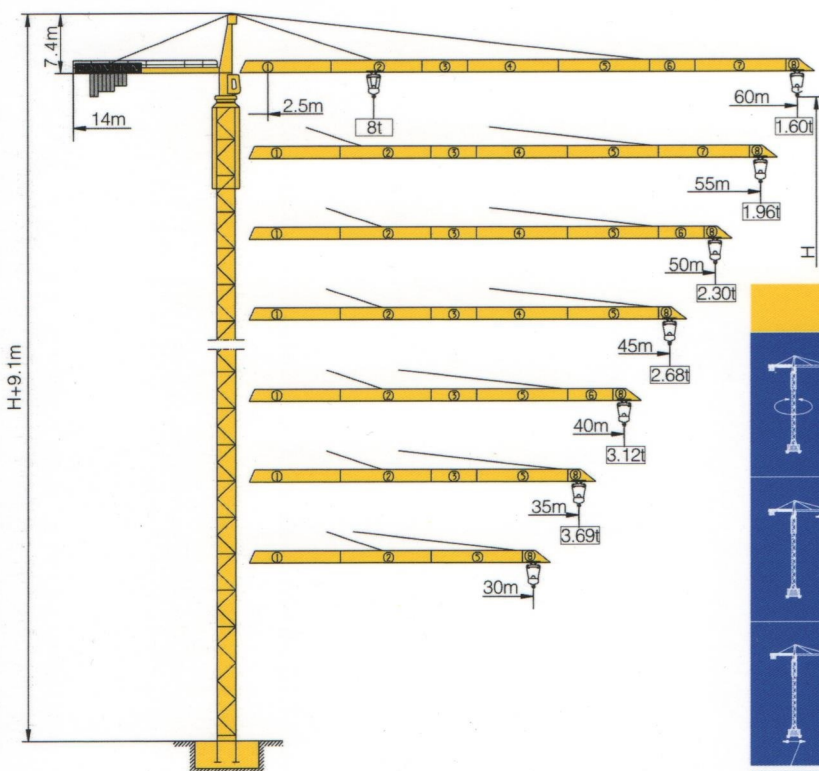


Mechanisms			Hoisting			QE8100D2	
	回转 Slewing	HPW55B.130		IV		4t	50 m/min
	0 ~ 0.8 r/min	2×55 kW					
	变幅 Trolley	BP40B		37/37kW		8t	25 m/min
	0 ~ 55 m/min	40 kW					
	行走 Travelling	ZA52A-D ZC52A-D		V		2t	100 m/min
	0 ~ 25 m/min	2×52 kW					
 380V(+10%~10%)50Hz						4t	50 m/min
			① Consult us if overtop				
					52.0+2 × 5.2 kW		


Load Diagrams

R(m)	Max.Capacity m/t	17	20	22	25	28	30	32	35	38	40	42	45	48	50	52	55	58	60
60m (R=61.74)	4t	4.00						3.72	3.33	2.99	2.80	2.63	2.40	2.20	2.08	1.97	1.82	1.68	1.60
	8t	7.78	6.43	5.74	4.92	4.28	3.93	3.62	3.23	2.89	2.70	2.53	2.30	2.10	1.98	1.87	1.72	1.58	1.50
55m (R=56.74)	4t	4.00						3.97	3.55	3.20	3.00	2.82	2.58	2.36	2.24	2.12	1.96		
	8t	8.00	6.83	6.10	5.24	4.65	4.19	3.87	3.45	3.10	2.90	2.72	2.48	2.26	2.14	2.02	1.86		
50m (R=51.74)	4t	4.00						3.64	3.29	3.08	2.89	2.65	2.43	2.30					
	8t	8.00	6.99	6.25	5.37	4.68	4.30	3.97	3.54	3.19	2.98	2.79	2.55	2.33	2.20				
45m (R=46.74)	4t	4.00						3.69	3.33	3.12	2.93	2.68							
	8t	8.00	7.07	6.32	5.43	4.73	4.35	4.02	3.59	3.23	3.02	2.83	2.58						
40m (R=41.74)	4t	4.00						3.69	3.33	3.12									
	8t	8.00	7.07	6.32	5.43	4.73	4.35	4.02	3.59	3.23	3.02								
35m (R=36.74)	4t	4.00						3.69											
	8t	8.00	7.08	6.33	5.43	4.74	4.35	4.02	3.59										
30m (R=31.74)	4t	4.00																	
	8t	8.00	7.09	6.34	5.44	4.74	4.36												


Masts Reactions

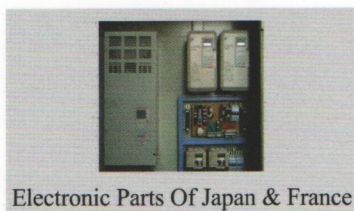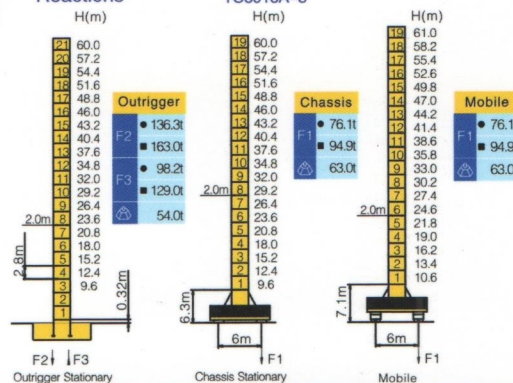

Electronic Parts Of Japan & France

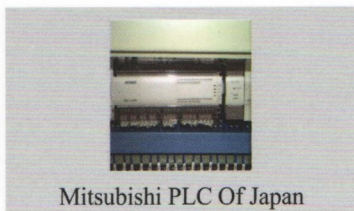

Mitsubishi PLC Of Japan

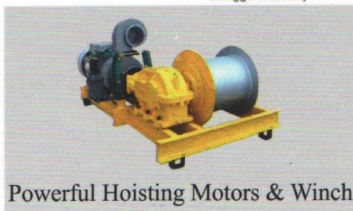

Powerful Hoisting Motors & Winch



Operation Panel